


KmN 1.4u

Achieve the most out of your underground application

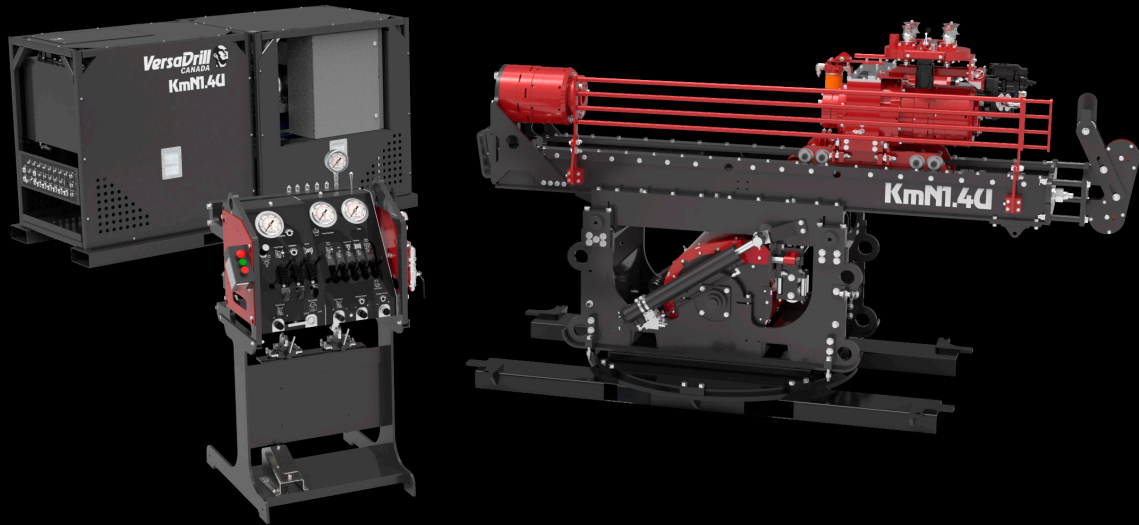

SPECIFICATIONS

Rotary head and chuck	
Holding capacity	Option available at over 35,000 lbs (15,875 kg)
Spindle interior dimension	4.9" (124 mm)
Chuck operation	Spring closed and hydraulically opened
Final drive	HV-80-3 chain in an oil bath
Hydraulic Motor	160 cc variable
Transmission	Several options available
Rotary Head Ratio	1:2.33
Lubrication	Pressurized pump, filter and cooler
Fabrication	Aluminum and steel (Steel-only optional)
Speed	0 to 1,250 RPM
WEIGHT	14,269 lbs (6,474 kg)

FEATURES AND BENEFITS

- Costs 50% less than the competition
- Save time and keep drilling from awl to pwl with the same head
- Compatible with most drill
- Quiet, no vibration and water resistant

STRONGER AND STRONGER

Distributor:



110 Jacques-Bibeau St., Rouyn-Noranda, QC J9Y 0A3, Canada

1 819 762-9645 info@mbiglobal.ca